



Test Report

No. SHSL1212287168TX

Date: Dec 20, 2012

Page 1 of 5

WU JIANG QIAN SI FANG TEXTILE CO., LTD
NO.6 EAST SECTION 2 EAST GARDEN, SHENGZE, WUJIANG CITY, JIANGSU PROVINCE, CHINA

The following sample(s) was/were submitted and identified on behalf of the client as:

Sample Description : Woven fabric: in beige
 Manufacturer : WU JIANG QIAN SI FANG TEXTILE CO., LTD

Test Performed : Selected test(s) as requested by applicant
 * * * * *

Sample Receiving Date : Dec 07, 2012
 Testing Period : Dec 10, 2012 TO Dec 20, 2012
 Test Result(s) : For further details, please refer to the following page(s).
 t

Signed for and on behalf of
SGS-CSTC Ltd.

Tina Xi
Account Executive

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755)83071443, or email: CN.Doccheck@sgs.com

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

SHSL 2468035

Test Result

Flammability Test

Test Requested:

NF P 92-507:2004 Fire safety-building-interior fitting materials-Classification according to their reaction to fire

I. Test conducted

This test was conducted according to NF P 92-507:2004 Fire safety-building-interior fitting materials - Classification according to their reaction. And the test methods as following:

1. NF P92-503:1995 Safety against fire Building materials – Reaction to fire tests Electrical burner test used for flexible materials
2. NF P 92-505:1995 Safety against fire—Building materials—Reaction to fire tests—Test used for thermal melting materials—Dripping test.

II. Details of classified product

The details of the tested specimen given below have been prepared from information provided by the sponsor of the test. All values quoted are nominal, unless tolerances are given.

Sample description	1-F-W in beige
Area Density	About 250g/m ²
Specimen size	About 600×180mm
Color	Beige

III. Conditioning

Prior to testing, the sample was conditioned,

In an atmosphere having a temperature of 23±2°C and a relative humidity of 50±5% for 7 days or until constant mass is obtained. The mass is considered as constant when two successive weightings 24 hours apart do not differ by more than 0.1% or 0.1 g (take the highest mass value).

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755)83071443, or email: CN.Doccheck@sgs.com

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's Instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

SHSL 2468036

IV. Test results

i) NF P92-503:1995 Electrical burner test

Exposed face identification: Face, Orientation: Weft (if applicable)

During the testing, the following details are noted	Sample 1	Sample 2	Sample 3	Sample 4
Hole (Yes/No)	Yes	Yes	Yes	Yes
Max. afterflame time after withdrawal the pilot flame (s)	--	--	--	--
Afterglow time (s)	--	--	--	--
Flaming molten droplets (Yes/No)	No	No	No	No
Non-flaming molten droplets (Yes/No)	Yes	Yes	Yes	Yes
Flaming debris (Yes/No)	No	No	No	No
Non-flaming debris (Yes/No)	No	No	No	No
White-hot spots with propagation effects (Yes/No)	No	No	No	No

After testing, the following details are noted;	Sample 1	Sample 2	Sample 3	Sample 4
Max. destruction length from the lower edge (cm)	15	15	15	15
Average length (cm)	15			
Max. width of the destroyed zones between 450mm and 600mm from the test piece lower edge (cm)	ND	ND	ND	ND
Average width (cm)	ND			

Remark: "ND" indicates Non-detected

ii) NF P 92-505:1995 Dripping test

	Sample 1	Sample 2	Sample 3	Sample 4
Flaming molten droplets (Yes/No)	No	No	No	No
Non-flaming molten droplets (Yes/No)	Yes	Yes	Yes	Yes
Ignite the wadding (Yes/No)	No	No	No	No

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

SHSL 2468037

Annex I, Requirements

Table 1 Resume of classification for flexible materials which thickness no more than 5mm

Test Items	Criteria of classification				
		Not ignite the wadding	Not ignite the wadding	Ignite the wadding	Ignite the wadding
Test for hot melt materials		Not ignite the wadding	Not ignite the wadding	Ignite the wadding	Ignite the wadding
Electrical Burner Test^{a)}	No drops	Non-flaming molten droplets	Flaming drops or debris	Non-flaming molten droplets	Flaming drops or debris
Inflammation ≤ 5s	M1	M1	M2	M4	M4
Inflammation > 5s and Average destroyed length <350 mm	M2	M2	M3	M4	M4
Inflammation > 5s and Average destroyed width <90 mm between the 450 mm and 600 mm in length	M3	M3	M4	M4	M4
Flame Spread Test (flame spread <2 mm/s)			M4	M4	M4

^{a)} If the materials presented a particular behaviour, the classification also need to refer to Table 3. The details of classification M0 refer to clause 3.3 of NF P 92-507:2004.

Table 3 Resume of classification for the materials presented a particular behaviour

Test Items	Criteria of classification				
		Not ignite the wadding	Not ignite the wadding	Ignite the wadding	Ignite the wadding
Test for hot melt materials		Not ignite the wadding	Not ignite the wadding	Ignite the wadding	Ignite the wadding
Flame Persistence Test	No drops	Non-flaming molten drops	Flaming drops or debris	Non-flaming molten drops	Flaming drops or debris
Flame persistence time ≤ 2s	M1	M1	M2	M4	M4
Flame persistence time ≤ 5s	M2	M2	M3	M4	M4
Flame persistence time > 5s and Flame Spread < 2 mm/s	M3	M3	M4	M4	M4

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

SHSL 2468038

STATEMENTS:

The test results relate to the behaviour of the test specimens of a product under the particular conditions of the test. They are not intended to be the sole criterion for assessing the potential fire hazard of the product in use.


The test results relate only to the specimens of the product in the form in which were tested. Small differences in the composition or thickness of the product may significantly affect the performance during the test and may therefore invalidate the test results. Care should be taken to ensure that any product, which is supplied or used, is fully represented by the specimens, which were tested.

Conclusion:

Classification: M1

Note: The classes with their corresponding fire performance are given in Annex I.

Photo Appendix:

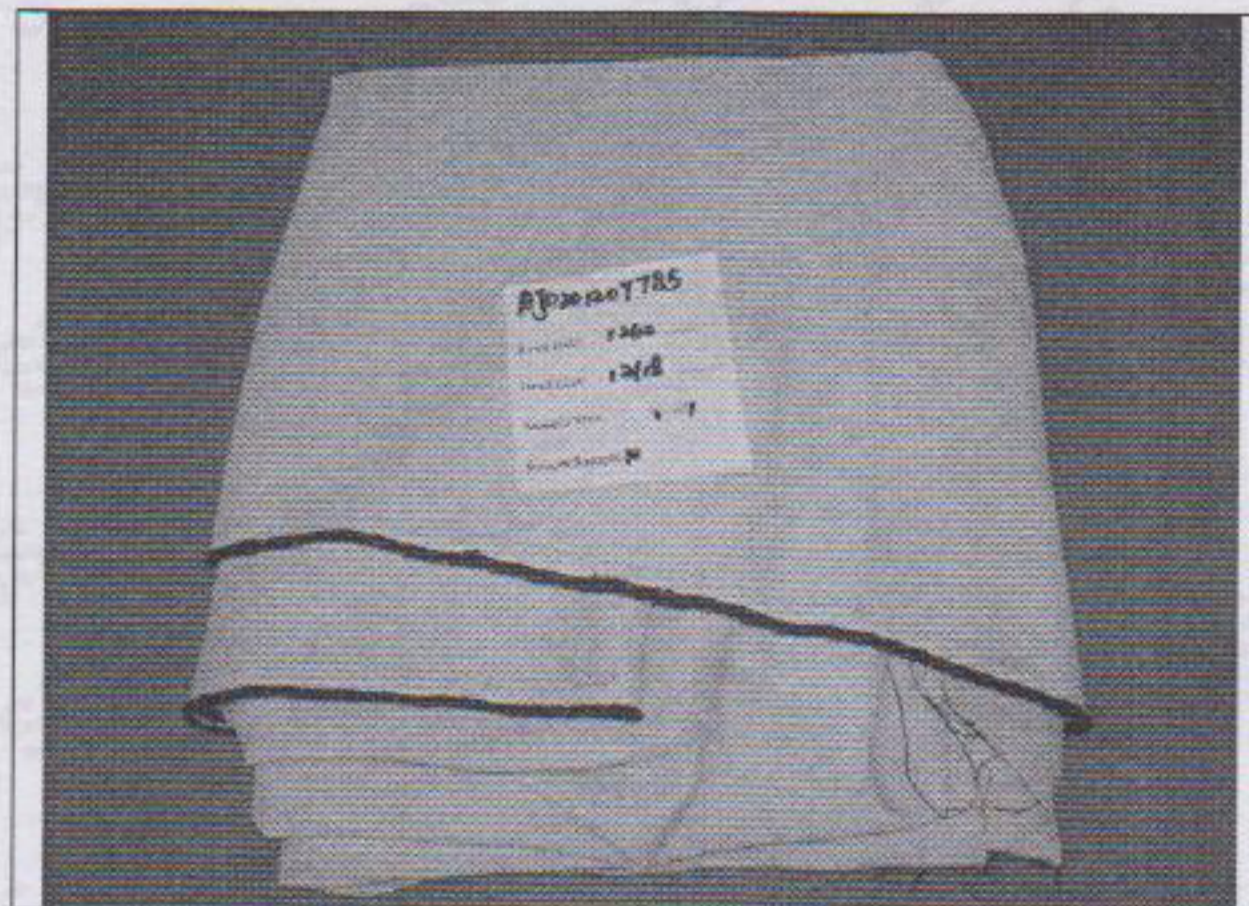

This test was carried out by SGS Anji flammability lab.

*** End of Report ***

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

SHSL 2468039